

#whdentalwerk



video.wh.com

Now at
your dealer
or wh.com



The breakthrough in **oral** **surgery**




piezomed
module



Modularity

The modularity offers the possibility of adapting the device to the requirements of the individual user.

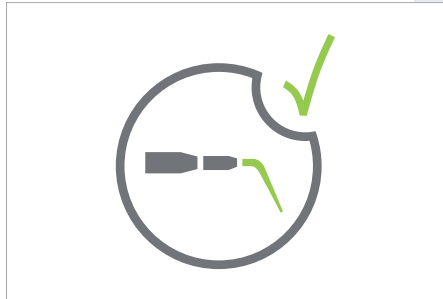


Automatic instrument detection

Piezomed detects the instrument when it is inserted and automatically sets the right power class.



Efficient cooling of the operating site

The spray is expelled close to the instrument's area of activity and thus provides ultra-efficient cooling of the operating site.

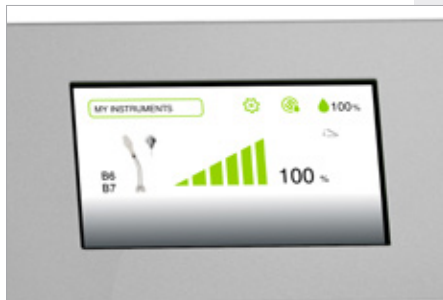


Instrument library

Enables the individual setting of the most important treatment parameters for the preferred instruments.



Absolute freedom of movement

The wireless foot control allows you to choose the optimal location in your working area. This ensures a level of safety in the treatment area.

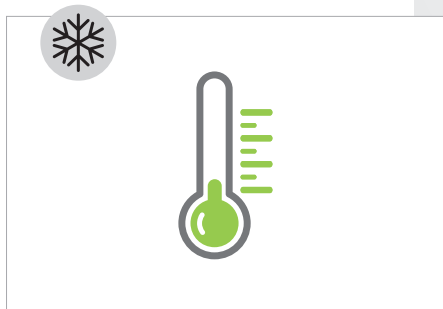

Cooling without case fan

This prevents disruptive noises. No impairment of the sterile environment due to the emission of cooling air.

The game changer in **piezo surgery**

The **Piezomed module** combines an implantology motor and piezo surgery in one device. This means Implantmed can be combined with the Piezomed module and can be used to cover several surgical applications.



Your compass for tomorrow's dental surgery

Oral surgery & implantology in perfect harmony for your treatment success.



STRAIGHT & CONTRA-ANGLE HANDPIECES

Provide optimal illumination of the treatment site and facilitate perfect, accurate treatment results.




OSSTELL® IMPLANT STABILITY SOLUTIONS™

Ensure predictability and enhance your dental implant treatments and patient communication with Beacon, SmartPegs and OsstellConnect.



PIEZOMED PLUS AND CLASSIC MODULE

Combine piezo surgery and implantology in one device.

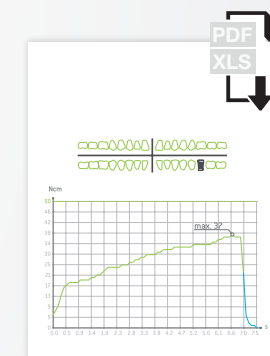

DOCUMENTATION FUNCTION

For clinicians to use data to enhance dental implant treatments and patient communication.



ELECTRIC MOTOR

Particularly small and surprisingly lightweight – for fatigue-proof working with various motor variants.



WIRELESS OR WIRED FOOT CONTROL

Control the Implantmed Plus and Piezomed module with just one foot control.

Features at a glance



Features	Piezomed	Piezomed Plus module	Piezomed Classic module
Automatic instrument detection	✓	✓	
Instrument library		✓	
Modularity		✓	✓
Wireless foot control	✓	✓	✓
Control unit cooling without case fan	✓	✓	✓
Osstell Beacon connection		✓	✓
Implantmed and Piezomed functions can be controlled with just one foot control	✓	✓	✓
Software update via USB		✓	✓
Implantmed and Piezomed in one device		✓	✓
Handpiece (incl. LED socket and cable) thermodisinfectable and sterilisable	✓	✓	✓
Pacemaker reports	✓	✓	✓
Boost function	✓	✓	✓
LED light	✓	✓	
24 watts		✓	
20 watts	✓ *		
18 watts			✓

* 24 W with boost function

Plus and Classic module

With the two available module versions **Piezomed Plus** and **Piezomed Classic**, W&H covers every piezosurgical practice need. No matter whether in everyday or intensive use.



Surgery workflow redefined

- Bone surgery**
High-frequency micro vibrations allow cutting with incredible precision.
- Threading**
Stress-free healing. It prevents compression of the bone.
- Osseointegration**
The Osstell Beacon enables the healing process of the implant to be monitored, even for high-risk patients.



- Implant insertion**
Controlled insertion of all implant types with a torque of up to 80 NCM.
- Documentation**
Inform referrers about the implant stability or present your results to a specialist audience.

Technical data

CE
0297

Type:	Piezomed SA-320	Piezomed Plus module SA-435 M	Piezomed Classic module SA-430 M
Supply voltage:	100–130 V/220–240 V	100–240 V	
Frequency:	50–60 Hz		
Permitted voltage fluctuation:	±10%		
Nominal current:	0.1–1.0 A/0.1–0.5 A	1.6 A	
Mains frequency:	50–60 Hz		
Maximum output US:	20 W*	24 W	18 W
Operating frequency:	22–35 kHz		
Coolant flow rate at 100%:	at least 60 ml/min	at least 90 ml/min	
Length of handpiece cable:	1.8 m/3.5 m	1.8 m/3.5 m	1.8 m without light
Dimensions in mm (height × width × depth):	256 × 305 × 109	90 × 140 × 285	
Weight:	7 kg	0.7 kg	0.6 kg
Foot control:	S-N1/S-NW with SPI dongle	S-N2/S-NW	

* 24 W with boost function



W&H Dentalwerk Bürmoos GmbH
 Ignaz-Glaser-Straße 53, Postfach 1
 5111 Bürmoos, **Austria**
t +43 6274 6236-0
f +43 6274 6236-55
 office@wh.com
wh.com

Pictures are for illustrative purposes only. Additional equipment and accessories shown are not included as standard.

20547 AEN Rev. 002 / 17.01.2024
 Subject to alterations